

Glacier SNGL-H/L DTO



STANDARD FEATURES



- working temperature: from -25°C to -21°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- 5 rows of suspended wire shelves for SNGL H and 4 rows for SNGL L, on shelves and on air inlet price holders 39 mm
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- lighting: vertical in doors frame, LEDit CW-2
- framed doors without heaters
- perspex divider between doors
- color of the base – black (RAL 9005)

OPTIONS

- electronic expansion valve
- bumper
- sidewalls

Glacier SNGL-L3 2342 DTO

DTO – door | triple, straight | hinged

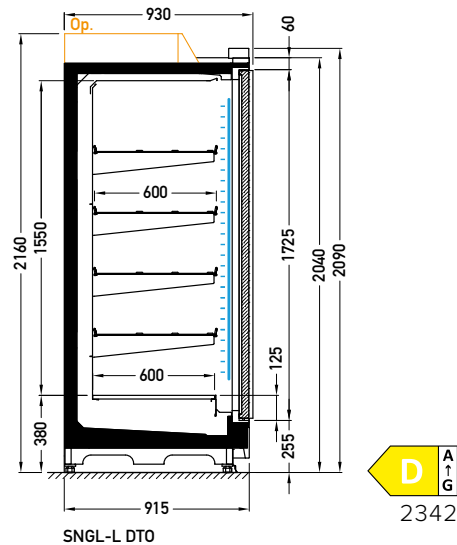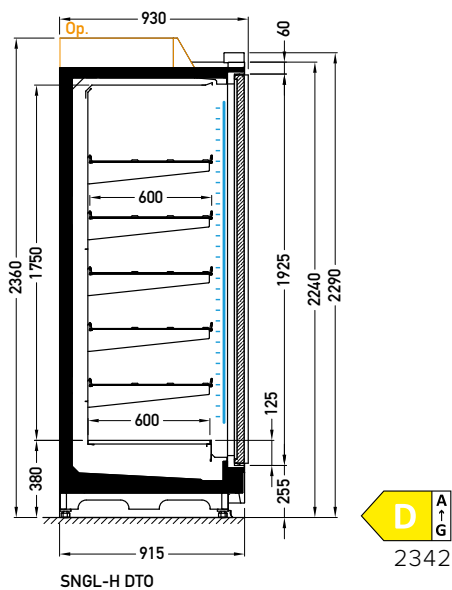

AVAILABLE MODULES

H2-1564 H3-2342 H4-3123 H5-3898
L2-1564 L3-2342 L4-3123 L5-3898

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.